


Mallory U-65 Midgetrol 5 Meg Ohm #1 Taper
 Resistance versus angle measurements. From Wiper to CCW lug
 This is a NOS potentiometer, which came to me unused in its original box.
 R. Grieb 8/26/2012 Resistance from end to end measured 6.52 Mohms

Angle from full ccw	Resistance
0	62
10	23
20	28
30	62
40	2300
50	13500
60	41600
70	75400
80	109000
90	140000
100	174000
110	232000
120	251000
130	288000
140	330000
150	375000
160	418000
170	461000
180	516000
190	571000
200	766000
210	1930000
220	2630000
230	3630000
240	4510000
250	5260000
260	5960000
270	6320000
280	6480000
290	6520000
300	6520000
310	6520000

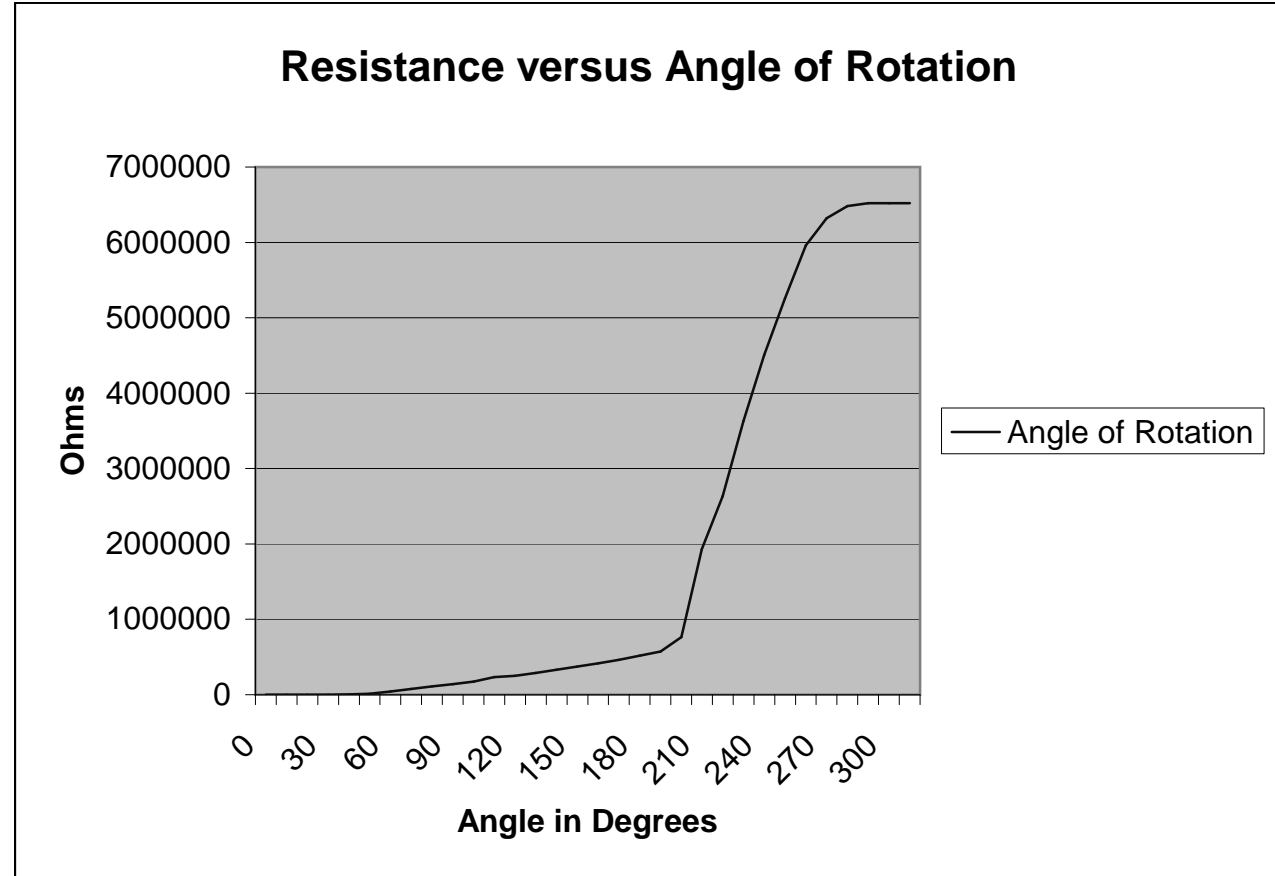

Full Cw